



Bettear EX4 | Data Sheet

Input Extension Unit

www.bettear.com



Highlights:

- Delay-free analog extension
- 4 dual-purpose inputs
- Seamless integration with B-SHOW

OVERVIEW

The B-SHOW streamer is a best-in-breed solution for streaming real-time audio over Wi-Fi and Auracast (*), providing a customized listening experience for the hard-of-hearing. The free Bettetear iOS and Android application allows users to connect easily and enjoy high-fidelity live audio content tailored to their unique preferences. This audio content is delivered through their earphones, cochlear implants, hearing aids, or induction loop receivers.


The B-SHOW streamer combines advanced technologies with a user-friendly design, making it easy for anyone to operate. This is the ideal choice for an optimal audio experience for those who seek to use cutting-edge technology to improve auditory accessibility.


The B-EX4 effortlessly integrates with B-SHOW and B-ART systems, introducing 4 additional input channels (6 Mono / 3 Stereo channels in total, including the SHOW system's built-in 2 Mono/1 Stereo channels). The unit is also equipped with phantom power (48V).

Bettetear's application allows to adjust audio settings effortlessly and provides an optional sound calibration feature for superior audio quality. Users can easily configure it through the web management dashboard, where multi-language transcriptions can be uploaded in real-time, event descriptions with images and text can be added, and the application can be personalized to suit their preferences.



TYPICAL USE CASES: MULTIPLE ANALOG INPUTS (MUSIC & LANGUAGES)

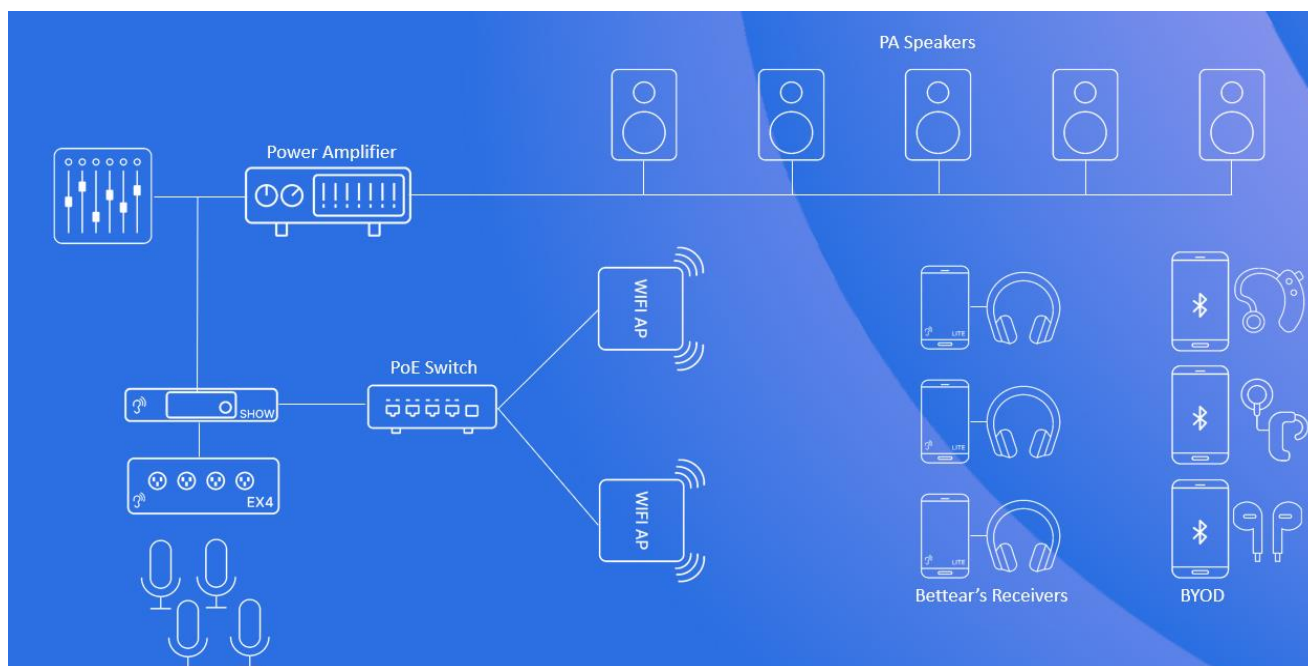

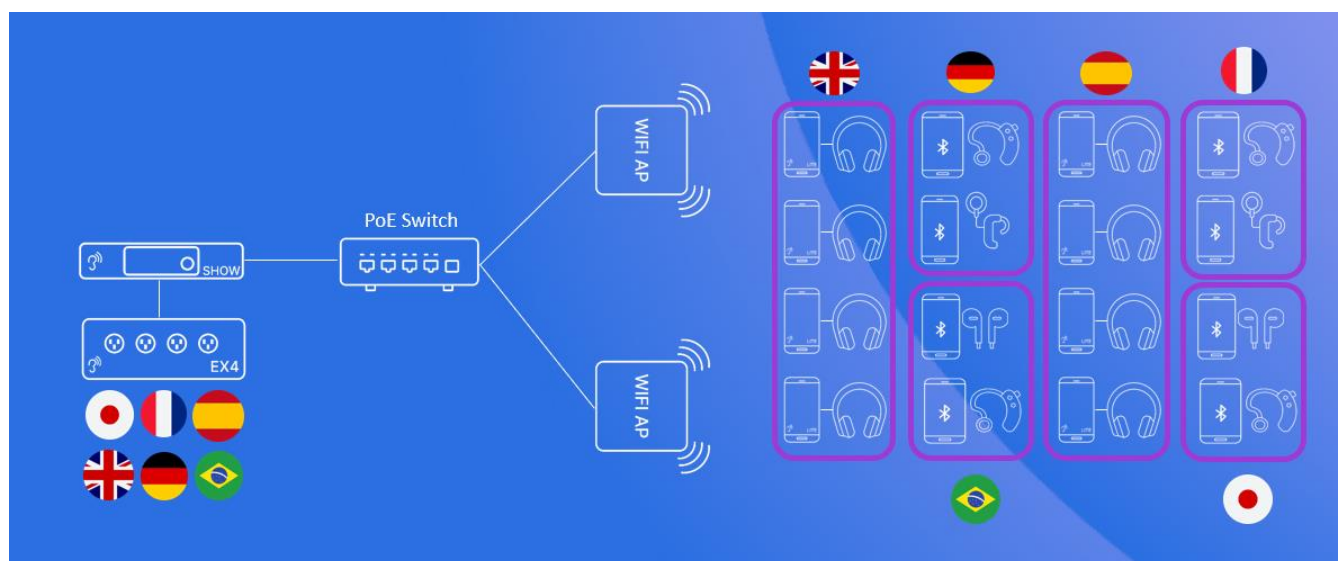

BETTEAR EX4 DETAILS

2 Stereo Channel 24bits 192kHz USB XLR Audio Interface Sound Extension Card

1. 4 in / 4 out interfaces, XLR ,MIDI, TRS 3.5mm interfaces
2. 48V Phantom power supply
3. Delay free
4. About 4 hours of service, large battery capacity, 500 mA
5. Updated treble and bass balance adjustment
6. Reducing noise with DSP clip, keep the original sound. WARRANTY
7. Dimensions: 130 x 292 x 45.81 mm / 5.12 x 11.50 x 1.80 inch

WARRANTY

Please visit www.bettear.com for the 2-year warranty and service information.

WARNING: Electrical Shock Hazard. No user-serviceable parts inside. Do not remove or open the cover to reduce the risk of electrical shock. Please contact Bettear for assistance.

SUPPORT

Please visit www.bettear.com and use info@bettear.com or call +972-3-7778630